


Grillon hook

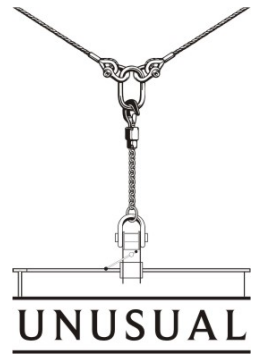

Adjustable lanyard for work positioning

Conforms to CE EN358

- Fine adjustment system for precise work positioning
- Use in double mode, on the harness lateral attachment points, to distribute the weight on the belt (user has weight on his feet); length is adjusted by pressing on the pivoting cam
- Use in single mode, on the harness ventral attachment point, to distribute weight between the waist belt and the leg loops (user is suspended); adjust length by operating the handle while holding the free end of the lanyard
- Removable protective sheath protects the rope from abrasive contact and gives smooth

rope glide. Sheath can be removed when used in single mode, bringing the user closer to the anchor

Lengths: 2m; 3m; 4m; 5m

All technical specifications are approximate and do not form part of any contract. Unusual Rigging cannot accept any responsibility for errors and omissions and reserves the right to make changes. The user must determine the suitability of any products for their own particular purpose, both alone and in conjunction with any other product and shall assume all risk and liability in connection with them.