


Closed body rigging screws c/w locknuts

Jaw – Jaw

Diameter thread	Length body	Length closed position	Length open position	Diameter pin	Length inside	Opening jaw	Width jaw	Diameter jaw eye	WLL	Weight each
a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	tons	kg
6	100	175	255	5	19	7.0	20	13	0.2	0.16
8	108	199	282	6	25	9.0	24	14	0.32	0.27
10	125	222	320	8	26	10.5	28	19	0.5	0.45
12	195	320	479	10	32	13.0	34	22	0.7	0.85
16	230	388	572	12	39	18.0	42	28	1.2	1.57
20	270	454	672	16	46	20.0	51	33	1.5	2.67
22	295	490	730	20	55	25.0	55	38	2.2	3.68
24	325	558	819	22	63	30.0	70	46	3.2	5.30
33	370	681	977	30	85	38.0	82	60	4.8	12.00
39	400	710	1017	33	86	45.0	85	76	6.0	14.20

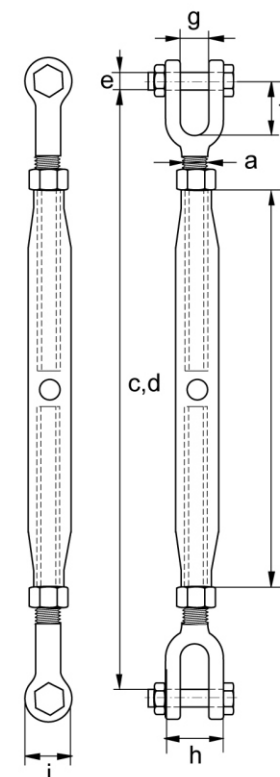

The Wharf,
Bugbrooke,
Northamptonshire,
NN7 3QB, UK

Tel: +44 (0)1604 830083
Fax: +44 (0)1604 831144
Email: info@unusual.co.uk
Web: www.unusual.co.uk

